
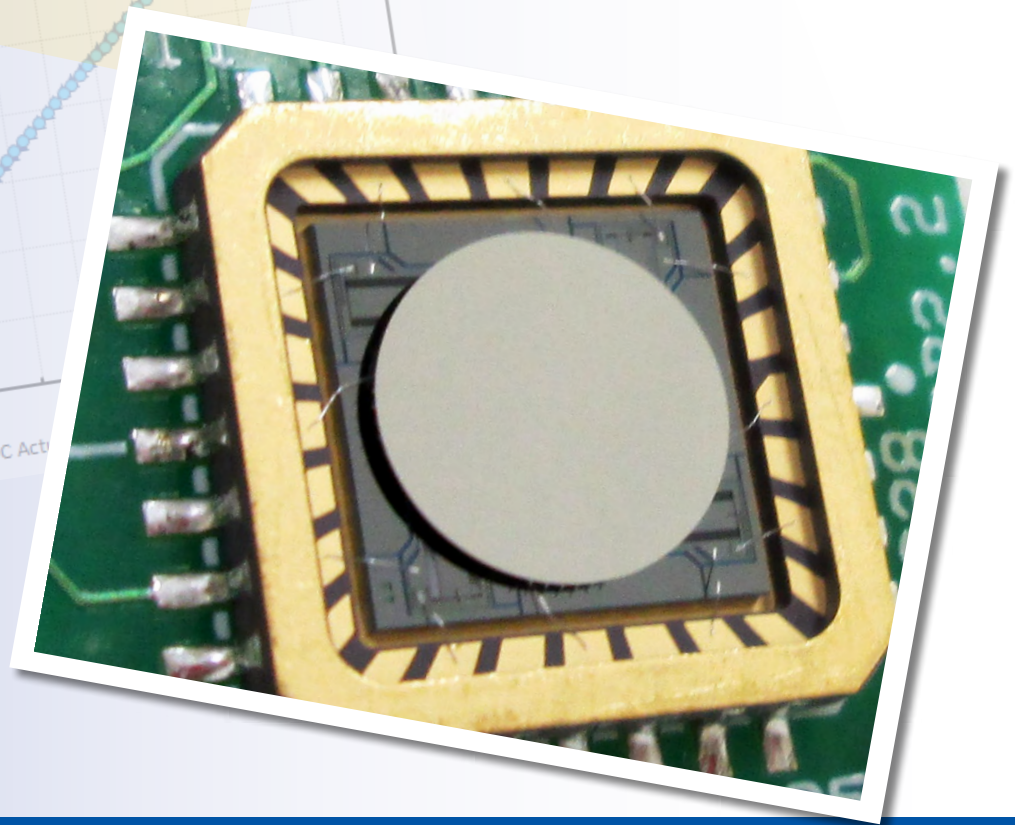


## Gimbal-Less Two-Axis Scanning MEMS Micromirrors

Device Datasheet  
S4472

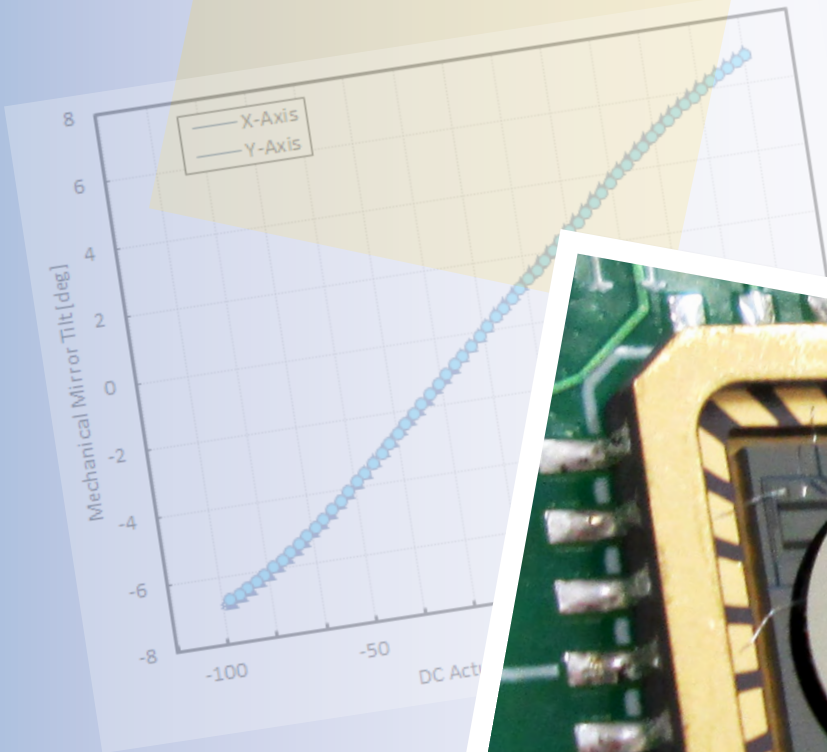

---

# Device Parameters Summary

**Device ID :** S4472

**Actuator Name :** A7B1.1

**Actuator Type :** 4-Quadrant (Two-Axis, Bidirectional)

**Mirror Type and Size :** Bonded mirror of 3.0mm diameter

**Mirror Coating :** Aluminum

**Maximum Angle - X Axis [degrees] :** 7.2037

**Maximum Angle - Y Axis [degrees] :** 7.1911

**Maximum Voltage - X Axis [V] :** 151

**Maximum Voltage - Y Axis [V] :** 150

**Bias Voltage [V] :** 80

**Maximum Angle - Coupled Axes [degrees] :** 9.2237

**Resonant Frequency - X Axis [Hz] :** 461

**Resonant Frequency - Y Axis [Hz] :** 461

**Quality Factor- X Axis :** 25

**Quality Factor - Y Axis :** 25


**Recommended LPF Cutoff Frequency (6th Order Bessel) :** 180

**Date and Time Report was Created:** 18-Mar-2015 at 17:1:50


---

# Static Response

## Voltage vs. Angle - Individual Axes

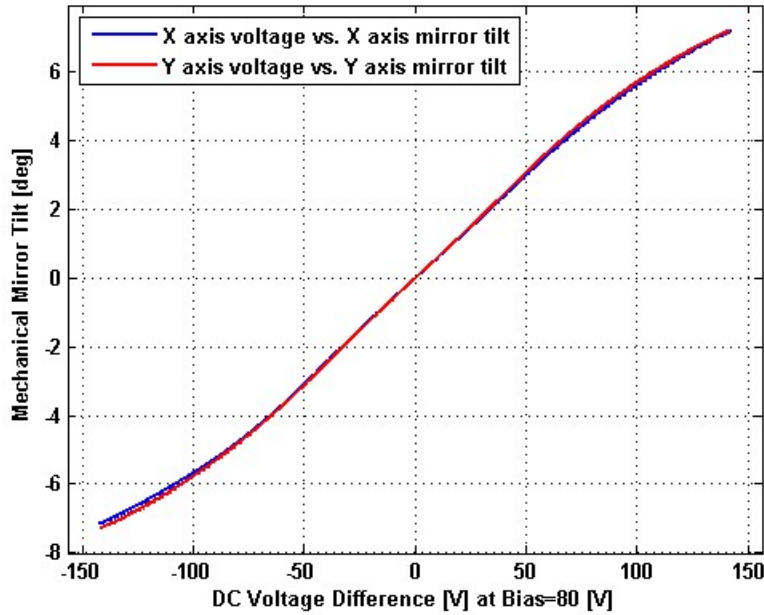


## Voltage vs. Angle - Coupled Axes

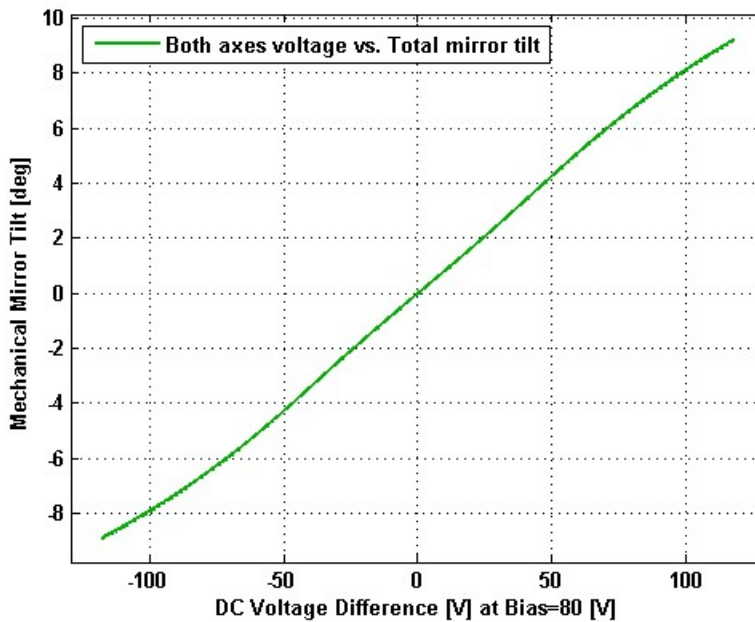


# Frequency Response

## Small Signal Frequency Response - Magnitude

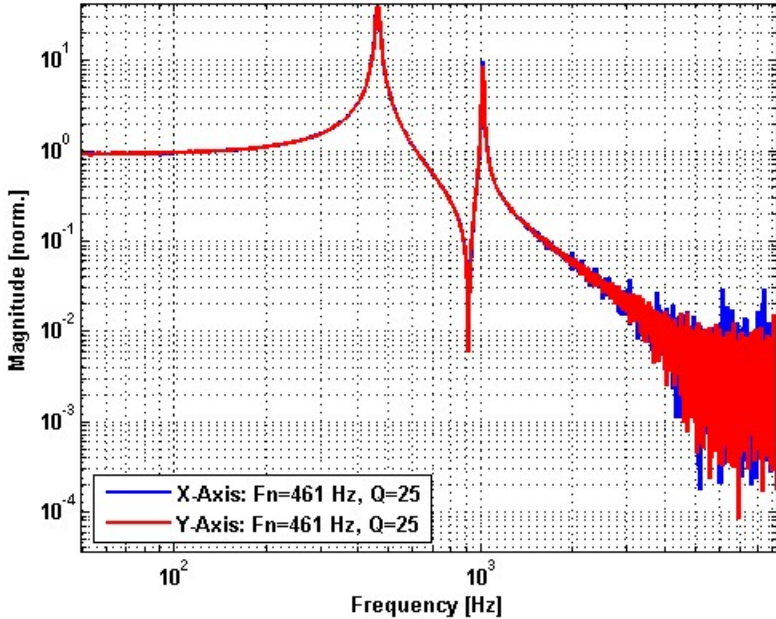


## Small Signal Frequency Response - Phase

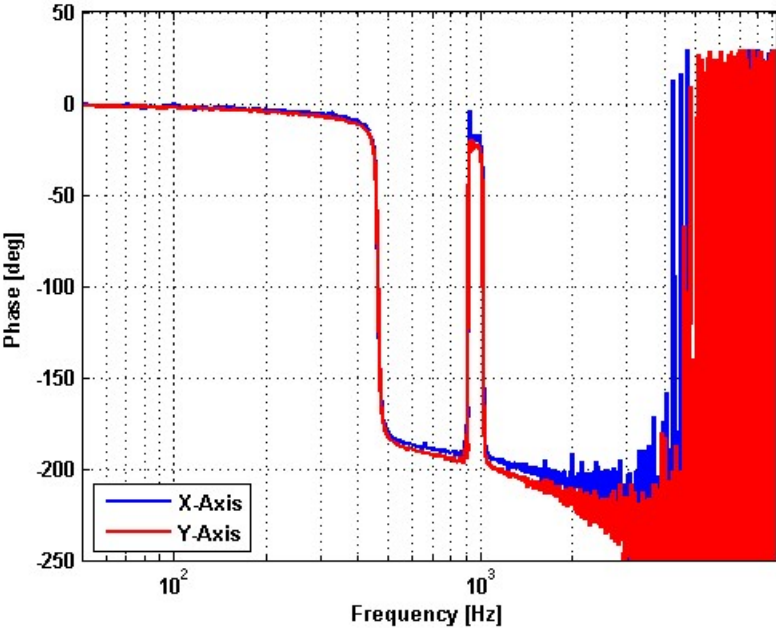


---

# Step Response

## X-Axis Step Response

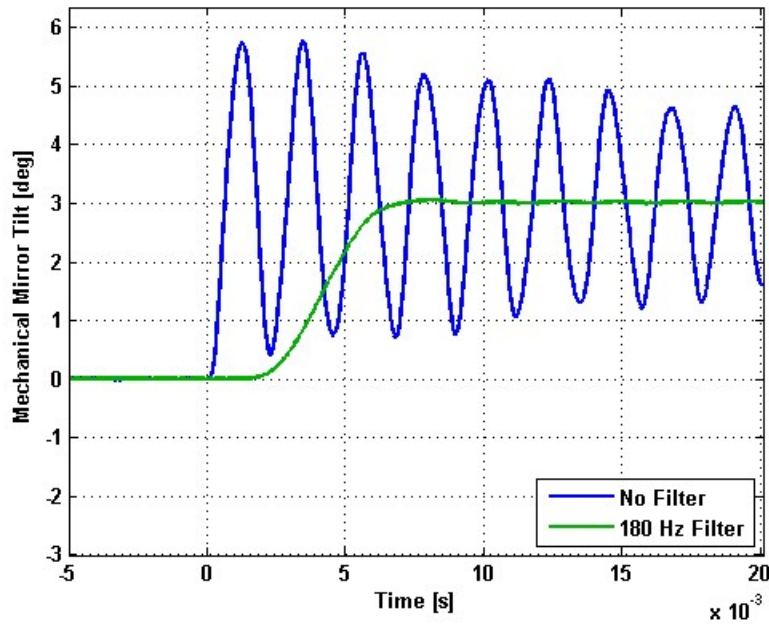


## Y-Axis Step Response

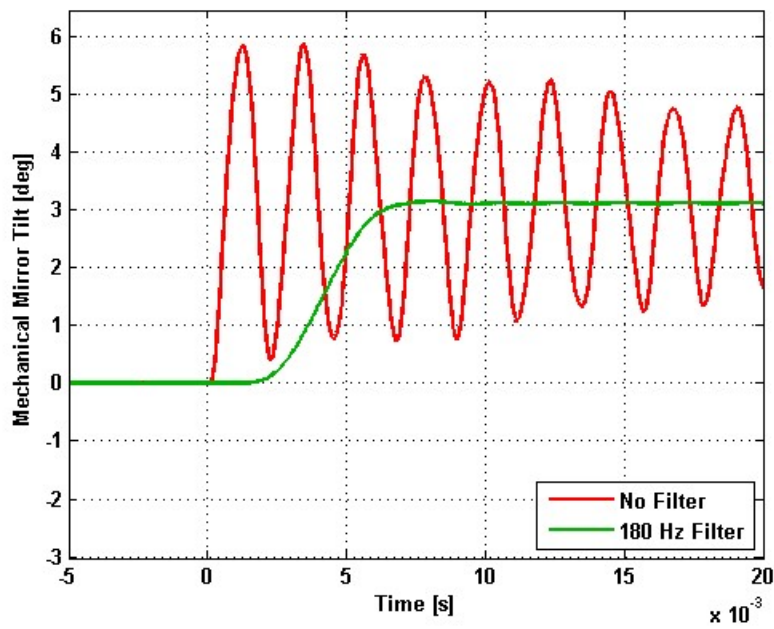


---

# 2D Lookup Tables

## Voltage vs. X Angle - Lookup Table

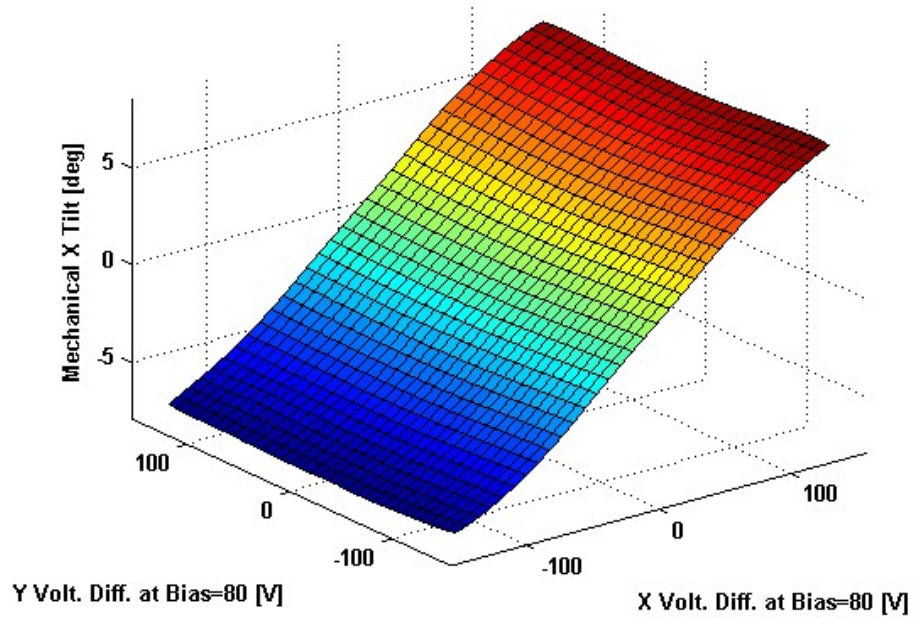

## Voltage vs. Y Angle - Lookup Table

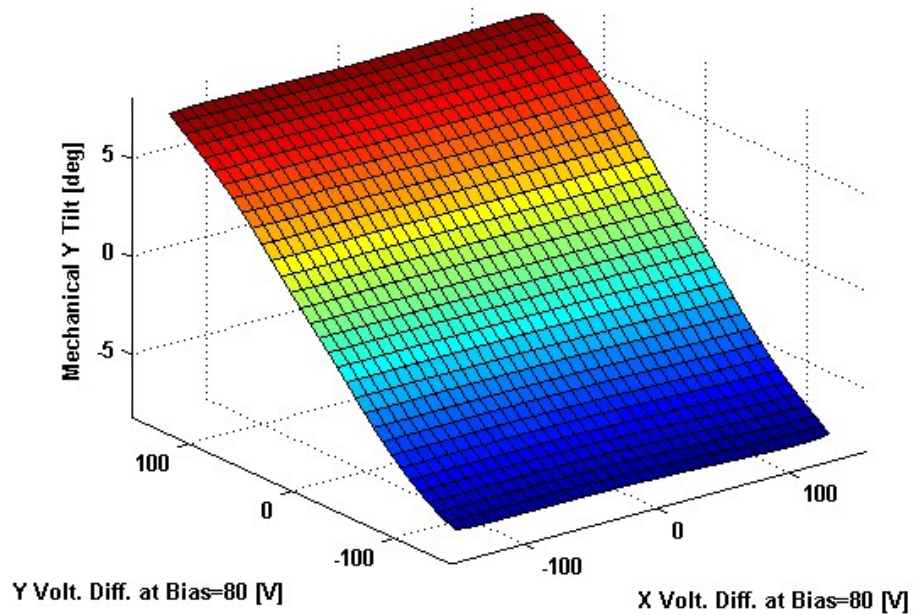

# Y Angle vs. X Angle - Addressable Angles

